
TOPlus mini pull-back size 26. Technical data



Size		**26**	
Variant		**Pull-back**	
Spindle nose	DU	A2-4	A2-5
Concentricity [mm]		0,015	
Max. radial clamping force [kN]		30	
Max. axial drawtube force [kN]		16	
RPM n max. [1/min.]		10000	
Clamping range [mm]	A	4 – 26	
Release stroke in Ø [mm]	C	1,0	
Reserve stroke in Ø [mm]	D	0,6	
Range / recommended workpiece tolerance [mm]		± 0,3	
End-stop depth [mm]	E	33,8	
Ø Capacity [mm]	BQ	27	
End-stop thread size [M]	BG	8	
Location front end-stop	F	Ø 67 f7	
Centering length [mm]	G	15	
Bolt hole circle end-stop	B	LK Ø 58 [3 x M4]	
Length [mm]	H	31	
Total length [mm]	I	73	74
Connecting thread inside	S	M40 x 1,5	M52 x 1,5
Outer Ø [mm]	AW	115	129
Depth of thread [mm]	M	16	
Position in clamped position [mm]	AU	6	7
Reserve stroke axial [mm]	Q	1	
Release stroke axial [mm]	R	2	
Clamping head serrated	AM	TOP 26	
Clamping head smooth	AO	TOP 26 G	
Bolt hole circle	V	LK Ø 82,6 [6 x M10]	LK Ø 104,8 [6 x M10]
Outer Ø 2 [mm]	FA	47,7	59,7
Weight [kg]		3	4
In stock		-	-
Order no.		10649/0001	10649/0002

Total length can be extended via flange.

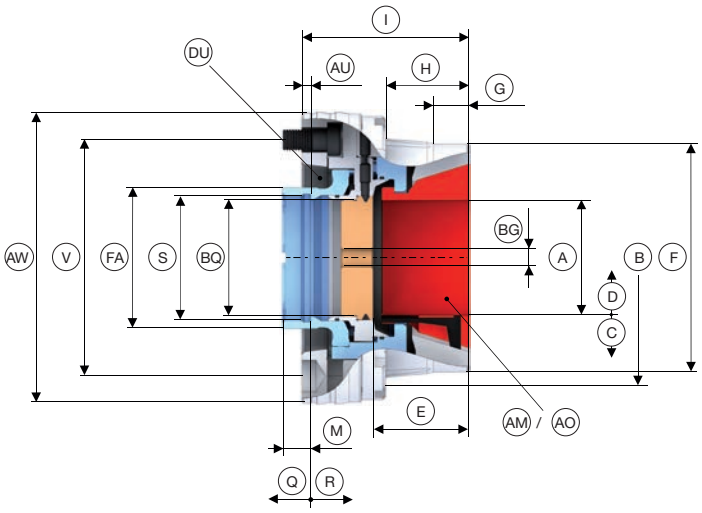


Clamping heads	Changing fixtures
Page 292	Page 348