
## **Eccentric chuck.** Technical data and order overview




| Size | | 65 | | |
|---|---|---|---|---|
| **Spindle nose** | DU | **A2-5** | **A2-6** | **A2-8** |
| Run-out ≤ [mm] | | 0,020 | | |
| Max. radial clamping force [kN] | | 105 | | |
| Max. axial drawtube force [pull / push] [kN] | | 45 | | |
| RPM n max. [1/min.] | | 6000 | | |
| Max. eccentricity [mm] | DO | 15 | | |
| Clamping range [mm] | A | 3 – 65 | | |
| Release stroke in Ø [mm] | C | 0,6 | | |
| Reserve stroke in Ø [mm] | D | 1 | | |
| End-stop depth [mm] | E | 96 | | |
| Length [mm] | H | 125,5 | | |
| Total length [mm] | I | 183 | | |
| Reserve stroke axial [mm] | Q | 2 | | |
| Release stroke axial [mm] | R | 2,5 | | |
| Outer Ø [mm] | AW | 205 | | |
| Inner Ø [mm] | AV | 56 | | |
| Weight [kg] | | 40 | 39,5 | 38,6 |
| In stock | | - | - | - |
| Order no. | | 3506/0001 | 3506/0002 | 3506/0003 |

Please note: RPM depends upon the chuck position and workpiece.
Machine spindle standard DIN 55026.

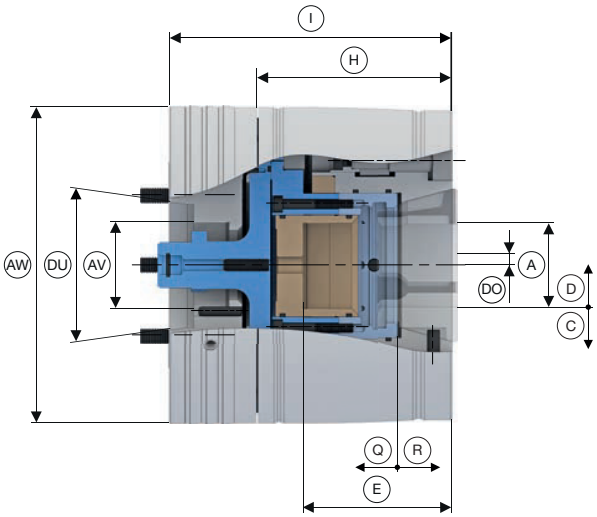

Clamping heads
Page 366


Accessory overview
Page 396